



# Tedlar®

polyvinyl fluoride film

## Chemical Properties, Optical Properties, and Weatherability Performance

### Chemical Properties

Tedlar® PVF film has excellent resistance to chemicals, solvents, and stains. It retains its film form and strength, even when boiled in strong acids and bases. At ordinary temperatures, the film

is not affected by many classes of common solvents, including hydrocarbons and chlorinated solvents. It is impermeable to greases and oils. It is partially soluble in a few highly polar solvents at temperatures above 149°C (300°F). See **Tables 1** and **2**.

**Table 1**  
**Chemical Resistance of Tedlar® PVF Film**  
 (After exposure to the environments, marked with an X below, Tedlar® showed no significant change in tensile strength, elongation to break, or pneumatic impact strength.)

	1-Year Immersion at Room Temperature	2-Hour Immersion at Boil	31-Day Immersion at 75°C (167°F)
<b>Acids</b>			
Acetic Acid (glacial)	X		X
Hydrochloric Acid (10% & 30%)			X
Hydrochloric Acid (10%)	X	X	
Nitric Acid (20%)	X		
Nitric Acid (10% & 40%)			X
Phosphoric Acid (20%)	X		
Sulfuric Acid (20%)	X		
Sulfuric Acid (30%)			X
<b>Bases</b>			
Ammonium Hydroxide (12% & 39%)	X		
Ammonium Hydroxide (10%)			X
Sodium Hydroxide (10%)	X	X	
Sodium Hydroxide (10% & 54%)			X
<b>Solvents</b>			
Acetone	X	X	
Benzene	X	X	
Benzyl Alcohol			X
Dioxane (14)			X
Ethyl Acetate			X
Ethyl Alcohol			X
n-Heptane	X		
Kerosene	X		
Methyl Ethyl Ketone			X
Toluene			X
Trichloroethylene			X
<b>Miscellaneous</b>			
Phenol	X		
Phenol (5%)			X
Sodium Chloride (10%)	X		
Sodium Sulfide (9%)			X
Tricresyl Phosphate			X

**Table 2**  
**Stain Resistance of *Tedlar*® PVF Film**

Staining Agent	TTR20SG4 Glossy	TWH15BL3 Delustered
Iodine	"Lestoil" (full strength)	Dry towel
Grape Juice	Damp towel	Damp towel
Grease	"Lestoil" (full strength)	"Lestoil" (full strength)
Mercurochrome	"Lestoil" (full strength)	"409" all-purpose cleaner
Ink, Carter's Black	"409" all-purpose cleaner	Methylene chloride

**Note:** Staining agents were applied to the film, allowed to dry for 24 hr, and then removed. Above are the strongest methods required to completely remove these stains.

## Optical Properties


### **Spectral Transmission**

Transparent types of *Tedlar*® PVF film are essentially transparent to solar radiation in the near ultraviolet,

visible, and near infrared regions of the spectrum. Ultra-violet absorbing types of *Tedlar*® are available for protection of various substrates against ultraviolet light attack.

Transmission spectra for *Tedlar*® are shown in **Figure 1**.

**Figure 1. Spectral Transmission**

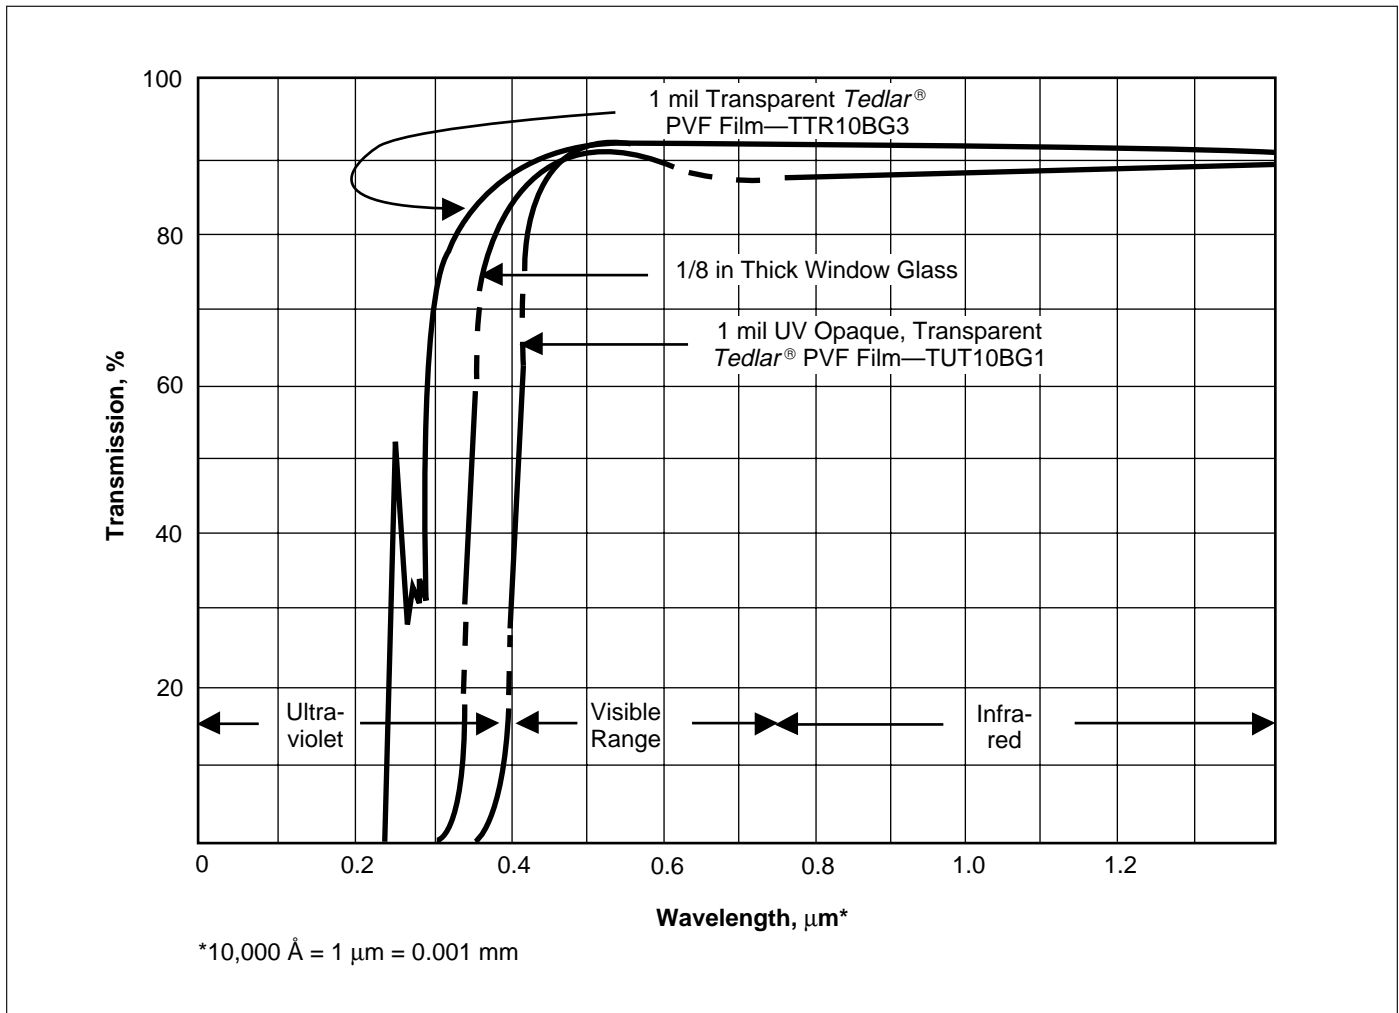

## Weatherability Performance

One of the outstanding characteristics of *Tedlar*® PVF film is its resistance to solar degradation.


Pigmented *Tedlar*®, properly laminated to a variety of substrates, imparts a long serviceable life. Most colors exhibit no more than five NBS units (Modified Adams Color Coordinates) color change after 20 years' vertical, U.S., outdoor exposure.

Unsupported transparent *Tedlar*® has retained at least 50% of its tensile strength after ten years in Florida facing south at 45°.

Color stability, Weather-Ometer, and Florida exposure are shown in **Figures 2, 3, and 4**.


Information in this bulletin applies only to *Tedlar*® and does not reflect on the performance of any substrate.

**Figure 2. Color Stability—Accelerated Exposure (Atlas Sunshine Arc Weather-Ometer)**

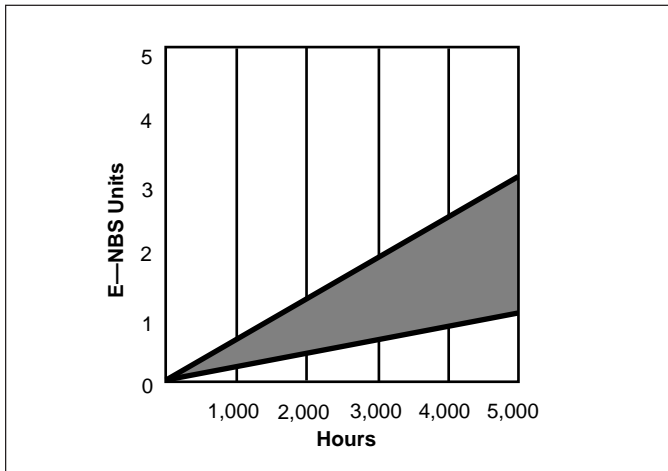


**Note:** Colored films vary slightly in color retention, depending on color.

**Figure 3. Accelerated Exposure (Atlas Sunshine Arc Weather-Ometer)**

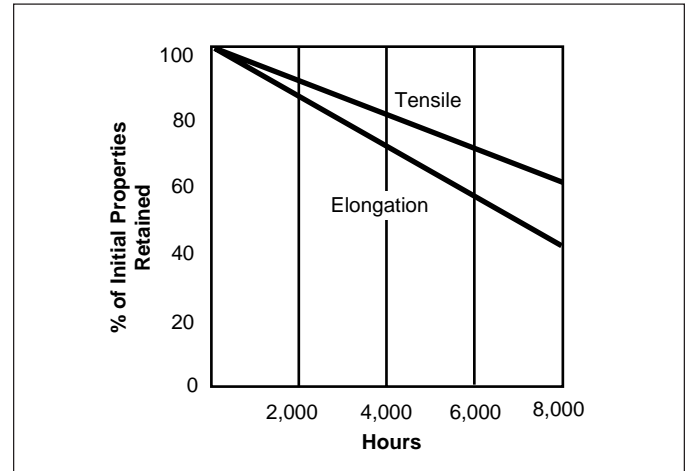

**Figure 4. Physical Property Retention—Florida Exposure (45° Facing South)**

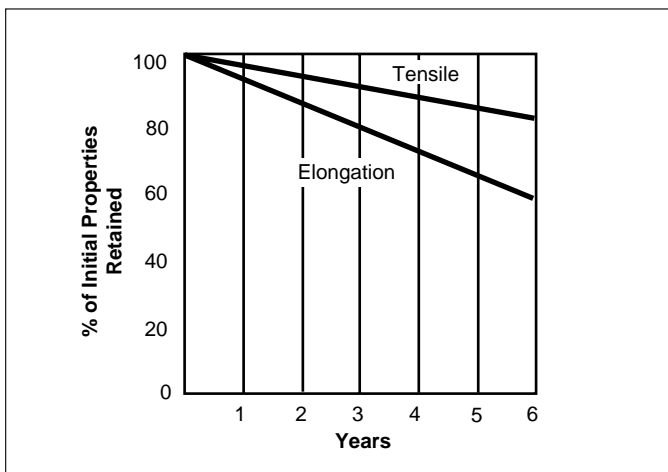

---

**For more information on *Tedlar*® PVF films:**

**(800) 255-8386**

DuPont *Tedlar*®  
P.O. Box 88  
Sheridan Drive and River Road  
Buffalo, NY 14207-0088

**Fax: (716) 879-4545**

---

***Europe***

DuPont de Nemours Int'l SA  
2, chemin du Pavillon  
P.O. Box 50  
CH-1218 Le Grand-Saconnex  
Geneva, Switzerland  
(022) 7175111

***Canada***

DuPont Canada, Inc.  
P.O. Box 2200, Streetsville  
7070 Mississauga Road  
Mississauga, Ontario, Canada  
L5M 2H3  
(905) 821-5193

***Japan***

DuPont Kabushiki Kaisha  
*Tedlar*® PVF Film  
4th Floor Chiyoda Honsha Bldg.  
5-18, Sarugaku-cho 1-chome  
Chiyoda-Ku, Tokyo 101 Japan  
(011) 81-3-5281-3428

---

***Asia Pacific***

DuPont Asia Pacific Ltd.  
TST P.O. Box 98851  
1122 New World Office Bldg.  
(East Wing)  
Salisbury Road, TST  
Kowloon, Hong Kong  
(011) 852-3-734-5345

DuPont Singapore PTE Ltd.  
1 Maritime Square #07-01  
World Trade Centre  
Singapore 099253  
(65) 273-2244

---

**Note:** We believe this information is the best currently available on the subject. It is offered as a possible helpful suggestion in experimentation you may care to undertake along these lines. It is subject to revision as additional knowledge and experience are gained. DuPont makes no guarantee of results and assumes no obligation or liability whatsoever in connection with this information. This publication is not license to operate under, or intended to suggest infringement, of any existing patents.

**CAUTION:** Do not use in medical applications involving permanent implantation in the human body. For other medical applications, see "DuPont Medical Caution Statement," H-50102.



**Tedlar**®  
Only by DuPont